



# LP12-7.2 T1 (12V 7.2 Ah)

Specifications	
Rated Voltage	12
Nominal Capacity	7.2 Ah (C <sub>20</sub> , 1.80V/cell)
Dimensions	Length 152 mm
	Width 65 mm
	Container Height 95 mm
	Total Height 100 mm
Approx. Weight	2.5 Kg (5.51 lbs)
Terminal	T1
Layout	3
Container material	ABS
Rated Capacity (25°C)	7.2 Ah (20hr, 0.36A, 1.80V/cell)
	6.7 Ah (10hr, 0.67A, 1.80V/cell)
	6.12 Ah (5hr, 1.22A, 1.75V/cell)
	5.37 Ah (3hr, 1.79A, 1.75V/cell)
	4.49 Ah (1hr, 4.49A, 1.60V/cell)
Max. Discharge Current	108A (5s)
Internal Resistance (25°C)	Approx 18mΩ
	Discharge: -15°C ~50°C (5~122°F)
Operating Temp. Range	Charge: 0°C ~40°C (32~104°F)
	Storage: -15°C ~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 2.16A. Voltage 14.4V~15.0V at 25°C (77 °F)Temp. Coefficient -30mV/°C
	No limit on Initial Charging Current Voltage
Standby Use	13.5V~13.8V at 25°C (77 °F)Temp. Coefficient -20mV/°C
	40°C (104°F) 103%
Effect Of Temp. To Capacity	25°C (77°F) 100%
	0°C (32°F) 86%
	LP series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.



## Description and Features

The LP Series AGM batteries have been specially developed to be widely applicable. These lead acid batteries with AGM technology are completely sealed and therefore 100% maintenance free and leak-proof. These batteries have a low self-discharge. The reliable and safe multipurpose batteries from the LP Series offer a long service life and can be used in various industries.

### Features

- Absorbent Glass Mat technology
- Reliable and safe performance
- Long service life - 3-5 years in standby application (at 25°C)
- Suitable for multipurpose applications


Layout	Terminal	UL certification

Constant Current Discharge Characteristics: A (25°C)															
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	13.7	9.12	7.52	6.61	5.41	4.22	3.50	2.15	1.62	1.33	1.13	0.98	0.777	0.649	0.356
1.80V/cell	16.4	10.9	8.8	7.56	6.05	4.64	3.79	2.30	1.73	1.41	1.19	1.02	0.806	0.670	0.360
1.75V/cell	19.7	12.5	9.8	8.36	6.48	4.96	4.00	2.40	1.79	1.45	1.22	1.05	0.828	0.686	0.364
1.70V/cell	22.9	14.0	10.8	9.05	6.91	5.20	4.18	2.48	1.83	1.48	1.25	1.07	0.841	0.697	0.370
1.67V/cell	25.2	15.2	11.6	9.70	7.27	5.43	4.32	2.56	1.88	1.52	1.27	1.09	0.854	0.706	0.375
1.60V/cell	27.8	16.4	12.5	10.2	7.66	5.65	4.49	2.63	1.93	1.56	1.30	1.12	0.872	0.718	0.377


Constant Power Discharge Characteristics: Wpc (25°C)															
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	25.6	17.1	14.1	12.5	10.3	8.10	6.76	4.17	3.15	2.60	2.21	1.92	1.535	1.285	0.706
1.80V/cell	29.7	20.0	16.3	14.1	11.4	8.83	7.27	4.44	3.35	2.75	2.32	2.00	1.587	1.323	0.712
1.75V/cell	35.3	22.7	18.0	15.5	12.1	9.40	7.65	4.61	3.45	2.81	2.37	2.05	1.626	1.354	0.718
1.70V/cell	40.4	25.0	19.6	16.7	12.9	9.79	7.95	4.76	3.53	2.87	2.42	2.09	1.649	1.375	0.731
1.67V/cell	43.9	26.7	20.8	17.7	13.4	10.2	8.18	4.90	3.61	2.93	2.47	2.12	1.671	1.389	0.740
1.60V/cell	47.5	28.5	22.0	18.4	14.0	10.5	8.45	5.00	3.68	2.99	2.51	2.17	1.704	1.411	0.743




### Discharge Characteristics

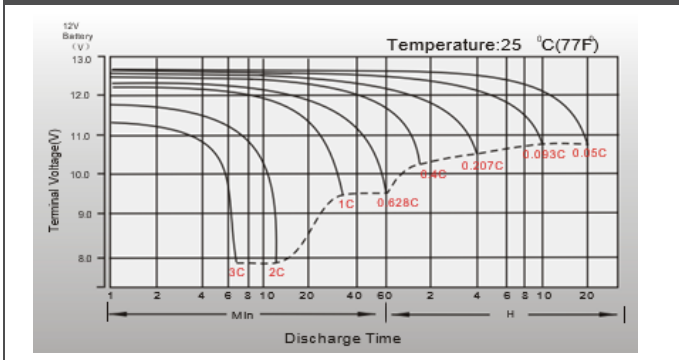


### Float Charging Characteristics

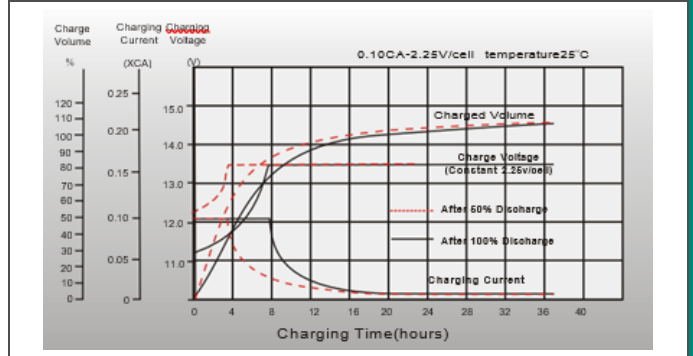

### Temperature Effects In Relation To Battery Capacity

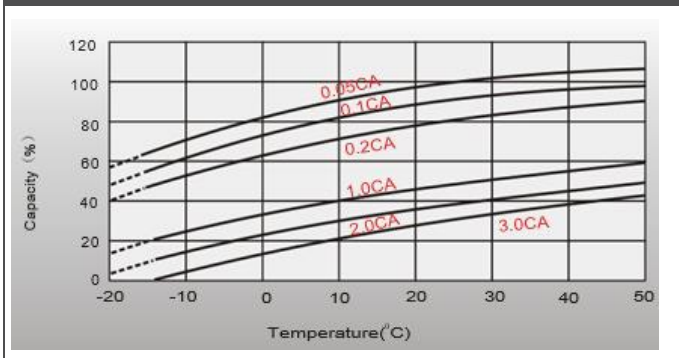

### Float Service Life

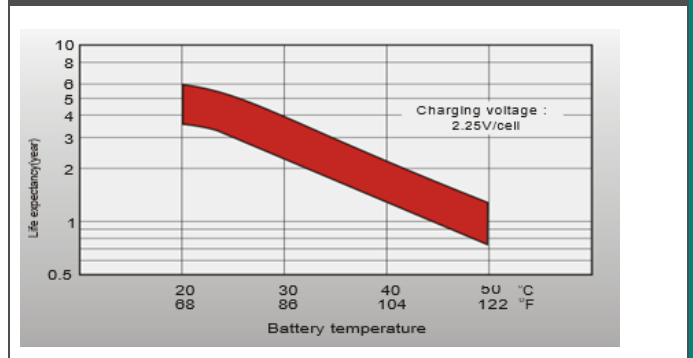

### Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

### General Features

- 5 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- UKCA Certified (for UK)
- IATF16949, ISO45001,ISO 9001 and ISO 14001 certified production facilities

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.